

# CPL<sup>+</sup>™ Series

CPL™ 15<sup>+</sup> - 2-way Passive Speaker



PRELIMINARY



## Description

The Crest Audio® CPL™ 15<sup>+</sup> is a passive two-way loudspeaker designed for music playback, public address and live performance reinforcement applications.

The CPL 15<sup>+</sup> can be utilised for both permanent installations and portable live sound applications. Perfect for public address, monitoring and background audio reinforcement purposes typically required in houses of worship, clubs, bars/restaurants, retail outlets plus education and corporate meeting facilities or anywhere high quality audio distribution is required.

The CPL 15<sup>+</sup> is equipped with a premium 15 inch woofer having a 3 inch voice coil together with a 1 inch compression driver known for its smooth frequency response and non-fatiguing mid range. Directivity pattern of the loudspeaker is measured at 90° horizontal and 60° vertical providing a wide yet well distributed audio coverage with exceptional time alignment between resonating components. An internal advanced crossover network maintains time alignment, EQ and driver protection. Impedance of the loudspeaker is 8Ω allowing for easy daisy chaining. Connectivity is made via either looping 4-pin twist-lock or 4-pin Euroblock connectors.


The CPL 15<sup>+</sup> enclosure is built from prime-grade 18 mm plywood that offers sturdy mechanical and low resonant electro-acoustic characteristics together with a heavy-duty steel grille backed with acoustic foam to ensure maximum protection of the internal components.

## Features

- **Passive two-way loudspeaker**
- **Premium 15" woofer, 3" voice coil**
- **1" Compression driver, 1.7" voice coil**
- **Continuous power handling: 500 Watts**
- **Nominal impedance: 8 Ohms**
- **Coverage pattern (HxV): 90° x 60° Rotatable Horn**
- **Connectors: 2 x 4-pin Twist-Lock & 4-pin Euroblock**
- **2+1/2- Loop Through**
- **Advanced crossover network**
- **Tweeter protection**
- **18 mm Plywood construction**
- **Textured polyurea paint**
- **12 x M8 suspension points (3 top, 3 bottom, 2 each side, 2 rear)**
- **4 x M8 suspension points for Versamount 70**
- **Available in Black and White**

Configuration:	2-way Passive Speaker	Pole Mount:	Optional with special adapter
Power Continuous (Watts):	500	U-Bracket:	Optional
Power Peak (Watts):	2,000	Enclosure Design:	Trapezoidal
Sensitivity (1W/1m):	98 dB	Enclosure Material:	Plywood (18 mm)
Max SPL Peak:	131 dB	Black Finish:	Textured Polyurea Paint
LF Driver:	1 x Crest Audio CPL15A - 15" (381 mm)	RAL #:	TBA
Woofer Voice Coil:	3" (76 mm)	White Finish:	Textured Polyurea Paint
HF Driver:	1 x Crest Audio HF44FP1 - 1" (25.4 mm) Neodymium	RAL #:	TBA
HF Driver Voice Coil:	1.7" (44 mm)	Tweeter Protection:	Yes
Nominal Coverage (HxV):	90° x 60° (Rotatable)	Rubber Feet:	Yes (not mounted)
Frequency Range (-10 dB):	38 Hz - 20 kHz	Handles:	Yes (1 x Left & 1 x Right)
Frequency Response (±3 dB):	TBA Hz - TBA kHz	Loop Thru (2+/2-):	Yes
Nominal Impedance:	8 Ohms	Logo Position on Grille:	Bottom Center
Input Connectors 1:	2 x 4-pin Twist-Lock (NL4 Style)	Logo Size:	25 x 25 mm
Input Connectors 2:	1 x 4-pin Euroblock	Grille Foam Backing:	Yes (acoustically transparent)
Suspension Points:	12 x M8	Grille Mesh Size (mm):	3 x 12
Suspension Points Location:	3 x Top, 3 x Bottom, 2 x Left, 2 x Right, 2 x Rear	Monitor Tilt Angle:	No
Suspension Points Rear:	4 x M8 (for optional Versamount 70)	Net Weight:	67.02 lbs (30.40 kg)
Mounting Points for U-Bracket:	Yes (2 x M8 - Top & Bottom)	Dimensions (HWD):	27.40 x 17.40 x 17.52 in (696 x 442 x 445 mm)

### Dimensions

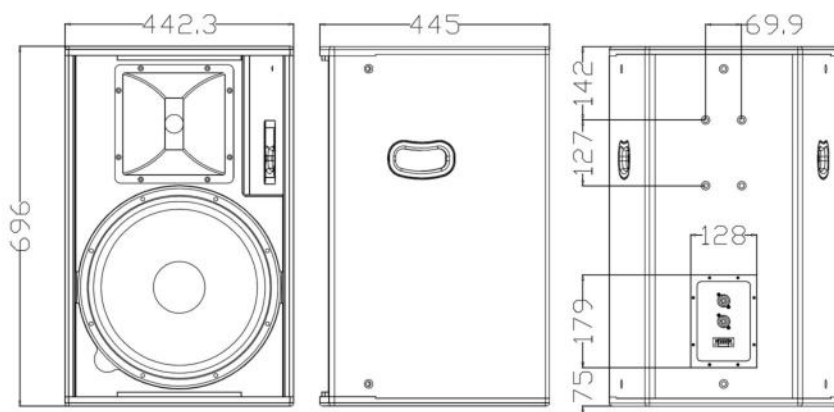

### Accessories



### Architect's & Engineer's Specifications

The loudspeaker shall consist of a 15 inch (381 mm) low frequency transducer with 3 inch (76 mm) voice coil and one 1 inch (25.4 mm) compression driver with a frequency dividing network installed within the enclosure.

Performance specifications of a typical production unit shall be: Measured sensitivity SPL at 1 m (3.3ft) with 2.83V input, shall be 98 dB-SPL. Usable frequency response shall extend from 38 Hz to 20 kHz (10 dB below rated sensitivity, in half-space, with no external equalization). Nominal impedance shall be 8 ohms. Rated power capacity shall be at least 500 Watts continuous power and 2,000 Watts peak power, defined as 3 dB above a test signal of filtered random noise.

The system shall be protected against damage from occasional over-powering limiting the power to the network and transducers. The compression driver shall be capable of even coverage at a nominal 90° horizontal through 60° distributed pattern. The horn shall be rotatable.

The enclosure shall be constructed from prime-grade 18 mm plywood. The grille shall be of heavy-duty steel backed with acoustically transparent foam. The external wiring shall be via either two 4-pin Twist-Lock or one 4-pin Euroblock connectors. The loudspeaker shall be no more than 27.40 inches (696 mm) high by 17.40 inches (442 mm) wide by 17.52 inches (445 mm) deep weighing no more than 67.02 pounds (30.40 kg). The finish shall be a paintable lightly textured black or white.

The loudspeaker shall be the Crest Audio CPL™ 15<sup>+</sup>.